

# On track to success - from prototype to serial production maturity

Measurement technology for rail vehicle testing



## Topic overview

- Getting on the right track by means of specialized railway measurement technology
- Direct import of railway bus system signals such as MVB
- Fast and secure measurement results using imc CRONOSflex and imc STUDIO
- Decentralized measurement: effective, flexible and reliable
- Keeping track of the entire situation with real-time measurement systems
- Robust measurement equipment for the stress and strain forces on rail vehicles
- TEDS-capability: automated sensor integration

## Your benefit - our goal:

- Saving time: real-time calculations by the measurement device itself
- PC-independent, robust, mobile and reliable
- All measurement devices are network- and synchronization-capable
- All imc systems are software-configurable
- User-customized expansions
- One-stop shop for measurement - throughout the testing cycle

- > **Transportation**
- > **Testing rail vehicles**

- > Automotive
- > Aerospace
- > Energy

- > Mechanical Engineering

- > Civil Engineering

Questi prodotti sono distribuiti e supportati in Italia da:



Instrumentation Devices Srl


Via Acquanera 29 - 22100 COMO (Italy)

ph +39 031 525 391- fax +39 031 507 984

info@instrumentation.it - www.instrumentation.it

## Getting development on track using specialized railway measurement technology

Finding efficient solutions for the specific requirements of railway technologies is of decisive importance for the manufacturers of railway vehicles. Safety issues play as much of a role as passenger comfort, speed and economic factors.

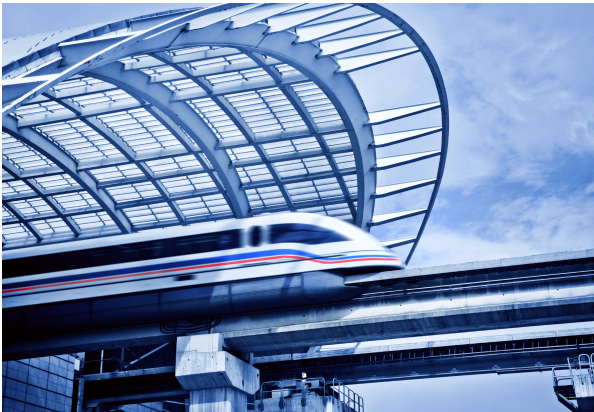

Extensive testing and measurement are performed prior to technical approval and commissioning of the new vehicles. Based on more than 15 years of experience in the testing of high-speed trains, as well as with standard applications in rail vehicle manufacturing, the company imc has created solutions to meet these requirements.

## Direct import of railway-specialized bus systems such as MVB

The recording of fieldbus information, such as that delivered by the Multifunction Vehicle Bus (MVB), provides new data capture possibilities. The MVB-Bus serves the purpose of transmitting information and commands within complex rail vehicle systems. Such components as the power train, brakes and air conditioning can be precisely inspected, analyzed and optimized in regard to their entire complexity.

The new imc CRONOSflex is an integrated and modular device concept, which extracts

measured variables directly from the MVB and handles them in combination with analog measurement channel data such as mechanical strain, acceleration, and temperatures. The data transmitted via MVB are imported in synchronization with all other measured data and subsequently treated as internal to the system.

Additionally, imc measurement instruments also work with bus systems such as IPT-COM and IWT.

## Rapid and reliable measurement results with imc CRONOSflex and imc STUDIO



Flexible, expandable, fast: imc CRONOSflex

Whether it's analog measurement on a few channels, or complete technical approval testing for a high-speed train on over 1,500 channels - in every case, the issues of measurement effectiveness and quality of results are crucial.

In these issues, the software- and hardware components of the measurement systems play an important role. With this in view, the measurement engineering software imc STUDIO offers clear and user-friendly handling. Even large channel counts are displayed in an organized manner, so that all data are available to multiple operators for viewing and analysis purposes.




Additionally, it is possible for data channels from a variety of sources to be displayed in imc STUDIO according to their respective measurement assignments.

imc STUDIO's curve window is a tool which enables user-defined display of data accumulating during measurement. Direct and immediate verification of the measurement is possible by means of measurement cursors and markers in the curve window. Placing comments with signal events can be accomplished in either textual or audio form.



**The imc STUDIO Panel:  
Configuring tailored user interfaces quickly and easily**

The design of the imc STUDIO's imc Panel component combines extensive functionality with an adaptable user interface - without requiring the hassle of complex programming. A wide variety of elements such as the curve window, numerical values, thermometers, pointer gauges, bar meters, text boxes, tables, switches, dials, buttons and much more are easy to place by means of the Drag & Drop technique and to associate them with functions. In this way, the user can design customized operating and display interfaces within a very brief time, which can also be used in the hard-copy report.

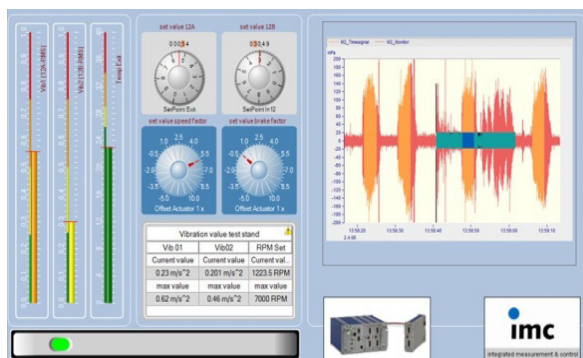

**Saving time using imc STUDIO**

imc STUDIO makes it easily possible to automate recurring measurement routines. The integrated imc Sequencer serves to join up individual measurement and analysis steps into a single sequence. Such routines as "Load Configuration", "Start Measurement", "Analyze Data", and "Compose Report" are simple to define, and so are even complex, multi-page user interfaces.

**Performing decentralized measurements:  
effective, flexible and reliable**

Just as measurement locations can be distributed throughout the various cars on a train, it needs to be possible to have a decentralized measurement system consisting of distributed local amplifiers and data recording and storage components.

These assemblies are arranged in a flexible way and directly at the sensor location, according to requirements. This makes installation and setup extensive, problem-prone and expensive sensor cabling obsolete. It also reliably avoids electromagnetic interference.

The imc CRONOSflex measurement system, with its network-based modular system architecture is the ideal platform for this purpose.



Flexible, expandable, fast: imc CRONOSflex





## Keeping track of the big picture through real-time measurement capability

The decentralized, distributed capture of measurement data both within and outside of the train is performed by imc systems in complete synchronization. Additionally, real-time processing, linkage and analysis of the data are thus possible.



Analog channels and the data from the train's internal fieldbusses can be processed online already during the measurement. By linking various data streams from different locations around the train and subjecting them jointly to calculation operations, it is possible to capture and categorize variables characterizing the operation status of whole functional assemblies. This substantially surpasses the information content which can be obtained from "simple" direct measurements. And in consequence, analysis does not have to wait for a separate subsequent process step. Instead, analysis can proceed in synchronization with, and be available alongside the raw data for visual display plus archiving and management.

This means that during a running test drive, a comprehensive overview of the train's current status, as well as of its individual components is available at any time. And beyond this, the immediate availability of real-time analysis results allows timely intervention in the unfolding test process, if necessary.

During test runs, it is possible to monitor and classify an enormous volume of data and complex results quickly, reliably and effectively even as testing proceeds.

imc provides support for this capability through "live multi monitoring". All data can be accessed from multiple monitoring stations (or PCs) in parallel, for the purposes of visually displaying the data and to tag them with accompanying commentary in either textual or audio (voice) form.

This meta data information, assigned along with associated cross-references to the respective measurement channels, is saved, together with any complementary video channels, in order to achieve an integrated overall profile consisting of analog, digital, virtual (calculated), fieldbus- and multi-media-channels. The entire "pool" of measurement information is available for sophisticated storage management, databases, and subsequent analysis procedures by means of imc FAMOS as well as of external tools. In this way, well-founded results are placed at the disposal of the appropriate R&D or inspection personnel who handle, for example, the braking, chassis, or power train systems.

## Rugged measurement equipment tailored to railway related stresses

imc measurement devices for railway applications are designed for mounting directly on the bogie. Thanks to their extraordinarily robust construction, even continual mechanical shock loading, as well as exposure to dust and projectile gravel, are no problem for these units. The imc measurement equipment is proven in harsh environmental conditions and performs its work reliably throughout an extremely wide climatic range.



imc CRONOScompact-02-BR2-4-IP65



imc CRONOScompact-02-BR2-4-IP65 shown with protective terminal caps

Beyond this, the measurement devices provide decisive flexibility: any device already configured can be quickly transplanted - ensuring swift transition between field and lab settings.

## TEDS-capability - automated sensor profile import

Another important aspect of imc amplifier channels is their compatibility with TEDS, enabling automatic import of all sensor profile information, such as the sensor type, sensor location, sensor power supply, transfer factor, input range and sampling rate, etc.

In this way, it is possible to hook up the sensors without needing to manually assign channels to the measurement device accordingly. Instead, individual assignments to the all-purpose measurement channels, as well as parameterization, documentation and data management are accomplished by the software.

Even strain gauge bridges for S/N curves can be equipped with TEDS and supplied with the necessary information directly at their respective installation location. This is of crucial importance for the purpose of reliably achieving very complex measurement setups, in which there may be hundreds of sensors installed.

## From single components all the way to total infrastructure solutions

Large, spread-out system configurations are especially easily achieved by means of imc measurement equipment. For the role of system components, the individual devices are equipped with standard Ethernet terminals, universal wide-range DC power supply (10 ... 50V DC), and precise synchronization mechanisms.



Infrastructure component: Measurement Control Unit (MCU)

### Turnkey solutions

Even for the purpose of managing the overall system, imc provides turnkey solutions meeting the particular requirements of the rail vehicle manufacturing industry. These include fiber-optic based, interference-free network solutions, UPS buffered PC technology and data servers, centralized internal reference clocks and modular power supply units.

The infrastructure boxes are suspended in a vibration-damping housing frames which are modular and easy to transport and install, making them ideal for mobile applications and operation in harsh environments.



Infrastructure components: Measurement Control Unit (MCU) and Time Control Unit (TCU)

**Compact, practical, organized:  
imc Switchbox**



The distribution board unit imc SPoE Switch IP65 enables the networking of multiple devices within a car with the modules working remotely under extreme conditions, attached to the bogie. By means of imc Switchbox, measurement devices can be hooked up with a power supply, synchronization and LAN-communication lines all with a single network cable. Having fewer cables not only means easier installation and more clarity, but also more flexibility, since devices are easier to relocate in consequence.

## More information:

imc Meßsysteme GmbH

Voltastr. 5  
13355 Berlin  
Germany

Phone: +49 (0)30 - 46 70 90-0  
Fax: +49 (0)30 - 46 31 57 6  
e-Mail: [hotline@imc-berlin.de](mailto:hotline@imc-berlin.de)  
Internet: [www.imc-berlin.com](http://www.imc-berlin.com)

By focusing on test & measurement productivity, imc Meßsysteme GmbH creates tools which empower engineers to deploy data acquisition systems and test strategies efficiently, meeting the test and measurement challenges of development departments.

Specializing in an integrated approach to physical test and measurement, imc solutions are well suited for mixed signal testing of complex mechanical and electromechanical systems. In these situations, test engineers demand are for flexibility and scalable capabilities, especially when a company understands that testing productivity is all about the efficient use of testing resources.

From mobile and in-vehicle testing, to autonomous field data recording; from small modular component test stands to customized turnkey automation systems, imc solutions and services are geared to meet customers' test and measurement challenges: imc's family of integrated signal conditioning and real time hardware, combined with software analysis and test management products encompass all aspects of the measurement and control work flow, from signal conditioning, real time analysis and control, to automated test control and report generation.

### Note to the reader

This document is copyrighted. All rights are reserved. The document may not be edited, revised, or altered in any way without permission. Publication and reproduction of this document, by contrast, are explicitly permitted. We request that in conjunction with any publication of this document that our company name and link to our homepage be included. In spite of our best efforts, this article may contain errors. If you notice any incorrect statements, we request you notify us accordingly at [marketing@imc-berlin.de](mailto:marketing@imc-berlin.de). No liability for the accuracy of this information applies.

Questi prodotti sono distribuiti e supportati in Italia da:



Instrumentation Devices Srl

Via Acquanera 29 - 22100 COMO (Italy)

ph +39 031 525 391- fax +39 031 507 984

[info@instrumentation.it](mailto:info@instrumentation.it) - [www.instrumentation.it](http://www.instrumentation.it)